


R0102

Espulsore testa cilindrica nitrurato - ossidato nero DIN1530/ISO6751 - TA
Nitrided oxidation coated ejector pin cylindrical head DIN1530/ISO6751 - TA

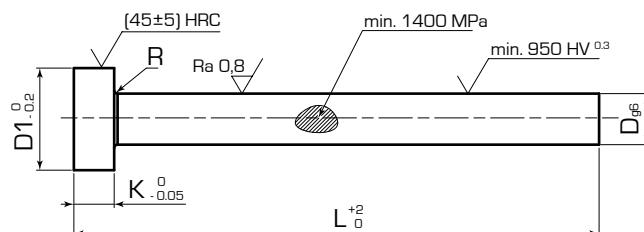

Descrizione:

Materiale: 1.2344 Nitrurato e Ossidato (nero)
Temperatura max. di esercizio: 500/550 °C
Esempio di ordinativo: R0102-01-0001


Description:

Material: 1.2344 Nitrided and Oxidated (black)
Max. work temperature: 500/550 °C
Example of purchasing order: R0102-01-0001

Codice Code	D	D1	K	R	L										
					100	125	160	200	250	315	400	500	630	800	1000
R0102-01	1.5	3	1.5	0.2	0001	0002	0003	0004							
R0102-01	2	4	2	0.2	0005	0006	0007	0008	0009	0010					
R0102-01	2.2	4	2	0.2	0011	0012	0013	0014	0015	0016					
R0102-01	2.5	5	2	0.3	0017	0018	0019	0020	0021	0022					
R0102-01	2.7	5	2	0.3	0023	0024	0025	0026	0027						
R0102-01	3	6	3	0.3	0028	0029	0030	0031	0032	0033	0034	0035			
R0102-01	3.2	6	3	0.3	0036	0037	0038	0039	0040	0041	0042				
R0102-01	3.5	7	3	0.3	0043	0044	0045	0046	0047	0048	0049				
R0102-01	3.7	7	3	0.3	0050	0051	0052	0053	0054	0055	0056				
R0102-01	4	8	3	0.3	0057	0058	0059	0060	0061	0062	0063	0064			
R0102-01	4.2	8	3	0.3	0065	0066	0067	0068	0069	0070	0071				
R0102-01	4.5	8	3	0.3	0072	0073	0074	0075	0076	0077	0078				
R0102-01	5	10	3	0.3	0079	0080	0081	0082	0083	0084	0085	0086	0087	0088	
R0102-01	5.2	10	3	0.3	0089	0090	0091	0092	0093	0094	0095	0096			
R0102-01	5.5	10	3	0.3	0097	0098	0099	0100	0101	0102	0103	0104			
R0102-01	6	12	5	0.5	0105	0106	0107	0108	0109	0110	0111	0112	0113	0114	
R0102-01	6.2	12	5	0.5	0115	0116	0117	0118	0119	0120	0121	0122	0123		
R0102-01	6.5	12	5	0.5	0124	0125	0126	0127	0128	0129	0130	0131			
R0102-01	7	12	5	0.5	0132	0133	0134	0135	0136	0137	0138	0139	0140		
R0102-01	7.5	12	5	0.5	0141	0142	0143	0144	0145	0146	0147	0148			
R0102-01	8	14	5	0.5	0149	0150	0151	0152	0153	0154	0155	0156	0157	0158	0159
R0102-01	8.2	14	5	0.5	0160	0161	0162	0163	0164	0165	0166	0167	0168	0169	
R0102-01	8.5	14	5	0.5	0170	0171	0172	0173	0174	0175	0176	0177	0178		
R0102-01	9	14	5	0.5	0179	0180	0181	0182	0183	0184	0185	0186	0187		
R0102-01	9.5	14	5	0.5	0188	0189	0190	0191	0192	0193	0194	0195			
R0102-01	10	16	5	0.5	0196	0197	0198	0199	0200	0201	0202	0203	0204	0205	0206
R0102-01	10.2	16	5	0.5	0207	0208	0209	0210	0211	0212	0213	0214	0215	0216	
R0102-01	10.5	16	5	0.5	0217	0218	0219	0220	0221	0222	0223	0224	0225		
R0102-01	11	16	5	0.5	0226	0227	0228	0229	0230	0231	0232	0233	0234		
R0102-01	12	18	7	0.8	0235	0236	0237	0238	0239	0240	0241	0242	0243	0244	0245
R0102-01	12.2	18	7	0.8	0246	0247	0248	0249	0250	0251	0252	0253	0254	0255	
R0102-01	12.5	18	7	0.8	0256	0257	0258	0259	0260	0261	0262	0263	0264	0265	
R0102-01	14	22	7	0.8	0266	0267	0268	0269	0270	0271	0272	0273	0274	0275	0276
R0102-01	16	22	7	0.8	0277	0278	0279	0280	0281	0282	0283	0284	0285	0286	0287
R0102-01	18	24	7	0.8	0288	0289	0290	0291	0292	0293	0294	0295	0296	0297	0298
R0102-01	20	26	8	1		0299	0300	0301	0302	0303	0304	0305	0306	0307	0308

R0102

Espulsore testa cilindrica nitruato - ossidato nero DIN1530/ISO6751 - TA
Nitrided oxidation coated ejector pin cylindrical head DIN1530/ISO6751 - TA

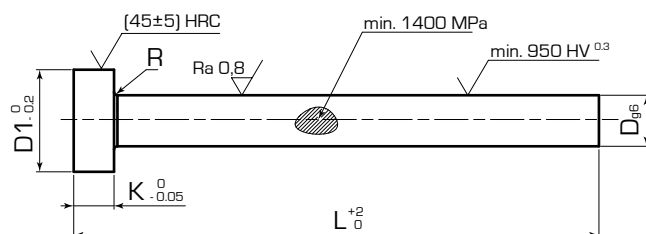

Descrizione:

Materiale: 1.2344 Nitruato e Ossidato (nero)
Temperatura max. di esercizio: 500/550 °C
Esempio di ordinativo: R0102-01-0001

Description:

Material: 1.2344 Nitrided and Oxidated (black)
Max. work temperature: 500/550 °C
Example of purchasing order: R0102-01-0001

Codice Code	D	D1	K	R	L										
					100	125	160	200	250	315	400	500	630	800	1000
R0102-01	25	32	10	1			0309	0310	0311	0312	0313	0314	0315	0316	0317
R0102-01	32	40	10	1				0318	0319	0320	0321	0322	0323	0324	0325