


R0104

Espulsore testa cilindrica nitruato forabile DIN1530/ISO6751 - AF
Perforable nitrided ejector pin cylindrical head DIN1530/ISO6751 - AF

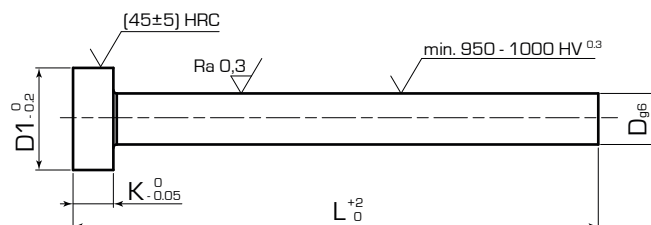

Descrizione:

Esempio di ordinativo: R0104-01-0001
Materiale: Acciaio da nitrurazione
Temperatura max. di esercizio: 500/550 °C

Description:

Example of purchasing order: R0104-01-0001
Material: Nitrided steel
Max. work temperature: 500/550 °C

Codice Code	D	D1	K	L						
				100	125	160	200	250	315	400
R0104-01	3	6	3	0001	0002	0003	0004	0005		
R0104-01	3.5	7	3	0006	0007	0008	0009	0010		
R0104-01	4	8	3	0011	0012	0013	0014	0015	0016	0017
R0104-01	4.5	8	3	0018	0019	0020	0021	0022	0023	0024
R0104-01	5	10	3	0025	0026	0027	0028	0029	0030	0031
R0104-01	5.5	10	3	0032	0033	0034	0035	0036	0037	0038
R0104-01	6	12	5	0039	0040	0041	0042	0043	0044	0045
R0104-01	6.5	12	5	0046	0047	0048	0049	0050	0051	0052
R0104-01	7	12	5	0053	0054	0055	0056	0057	0058	0059
R0104-01	7.5	12	5	0060	0061	0062	0063	0064	0065	0066
R0104-01	8	14	5	0067	0068	0069	0070	0071	0072	0073
R0104-01	8.5	14	5	0074	0075	0076	0077	0078	0079	0080
R0104-01	9	14	5	0081	0082	0083	0084	0085	0086	0087
R0104-01	10	16	5	0088	0089	0090	0091	0092	0093	0094
R0104-01	12	18	7	0095	0096	0097	0098	0099	0100	0101
R0104-01	14	22	7	0102	0103	0104	0105	0106	0107	0108
R0104-01	16	22	7	0109	0110	0111	0112	0113	0114	0115
R0104-01	18	24	7	0116	0117	0118	0119	0120	0121	0122
R0104-01	20	26	8	0123	0124	0125	0126	0127	0128	0129
R0104-01	25	32	10			0132	0133	0134	0135	0136
R0104-01	32	40	10				0140	0141	0142	0143

Possibili impieghi

Range of application

