


R0106

Anima DIN1530/ISO6751 - AHX

Non-nitrided core pin DIN1530/ISO6751 - AHX

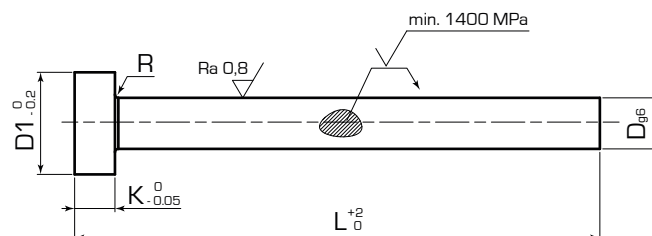

Descrizione:

Esempio di ordinativo: **R0106-01-0001**

Materiale: 1.2344 Bonificato, non nitrurato
Temperatura max. di esercizio: 500/550 °C

Description:

Example of purchasing order: **R0106-01-0001**


Material: 1.2344 Quenched, not nitrided
Max. work temperature: 500/550 °C

Codice Code	D	D1	K	R	L												
					63	80	100	125	160	200	250	315	400	500	630	800	1000
R0106-01	1	3	1.5	0.2			0001										
R0106-01	1.5	3	1.5	0.2			0002	0003	0004	0005							
R0106-01	2	4	2	0.2		0011	0006	0007	0008	0009	0010						
R0106-01	2.2	4	2	0.2			0012	0013	0014	0015							
R0106-01	2.5	5	2	0.3			0016	0017	0018	0019	0020	0021					
R0106-01	2.7	5	2	0.3			0022	0023	0024	0025							
R0106-01	3	6	3	0.3		0034	0026	0027	0028	0029	0030	0031	0032	0033			
R0106-01	3.2	6	3	0.3			0035	0036	0037	0038	0039	0040	0041				
R0106-01	3.5	7	3	0.3			0042	0043	0044	0045	0046	0047	0048				
R0106-01	3.7	7	3	0.3			0049	0050	0051	0052							
R0106-01	4	8	3	0.3	0061	0062	0053	0054	0055	0056	0057	0058	0059	0060			
R0106-01	4.2	8	3	0.3	0070	0071	0063	0064	0065	0066	0067	0068	0069				
R0106-01	4.5	8	3	0.3			0072	0073	0074	0075	0076	0077	0078				
R0106-01	5	10	3	0.5		0088	0079	0080	0081	0082	0083	0084	0085	0086	0087	0089	
R0106-01	5.2	10	3	0.5			0090	0091	0092	0093	0094	0095					
R0106-01	5.5	10	3	0.5			0096	0097	0098	0099	0100	0101	0102	0103			
R0106-01	6	12	5	0.5		0113	0104	0105	0106	0107	0108	0109	0110	0111	0112		
R0106-01	6.2	12	5	0.5			0114	0115	0116	0117	0118	0119	0120	0121	0122		
R0106-01	6.5	12	5	0.5			0123	0124	0125	0126	0127	0128	0129	0130			
R0106-01	7	12	5	0.5			0131	0132	0133	0134	0135	0136	0137	0138	0139		
R0106-01	7.5	12	5	0.5			0140	0141	0142	0143	0144	0145	0146	0147			
R0106-01	8	14	5	0.5			0148	0149	0150	0151	0152	0153	0154	0155	0156	0157	
R0106-01	8.2	14	5	0.5			0158	0159	0160	0161	0162	0163	0164				
R0106-01	8.5	14	5	0.5			0165	0166	0167	0168	0169	0170	0171		0172		
R0106-01	9	14	5	0.5			0173	0174	0175	0176	0177	0178	0179	0180			
R0106-01	9.5	14	5	0.5			0181	0182	0183	0184	0185	0186					
R0106-01	10	16	5	0.5			0187	0188	0189	0190	0191	0192	0193	0194	0195	0196	
R0106-01	10.2	16	5	0.5			0197	0198	0199	0200	0201	0202	0203		0204	0205	
R0106-01	10.5	16	5	0.5			0206	0207	0208	0209	0210	0211	0212	0213			
R0106-01	11	16	5	0.5			0214	0215	0216	0217	0218	0219					
R0106-01	11	16	5	0.8									0220	0221	0222		
R0106-01	12	18	7	0.8			0223	0224	0225	0226	0227	0228	0229	0230	0231	0232	
R0106-01	12.2	18	7	0.8			0233	0234	0235	0236	0237	0238	0239				
R0106-01	12.5	18	7	0.8			0240	0241	0242	0243	0244	0245	0246	0247			
R0106-01	14	22	7	0.8			0248	0250	0251	0252	0253	0254	0255	0256	0257	0258	0249
R0106-01	16	22	7	0.8			0259	0260	0261	0262	0263	0264	0265	0266	0267	0268	

R0106

Anima DIN1530/ISO6751 - AHX

Non-nitrided core pin DIN1530/ISO6751 - AHX

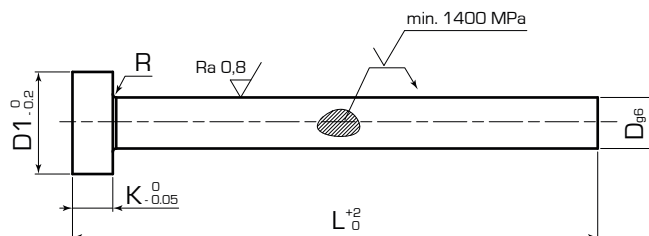

Descrizione:

Esempio di ordinativo: **R0106-01-0001**

Materiale: 1.2344 Bonificato, non nitruato

Temperatura max. di esercizio: 500/550 °C

Description:

Example of purchasing order: **R0106-01-0001**

Material: 1.2344 Quenched, not nitrided

Max. work temperature: 500/550 °C

Codice Code	D	D1	K	R	L												
					63	80	100	125	160	200	250	315	400	500	630	800	1000
R0106-01	18	24	7	0.8			0269	0270	0271	0272	0273	0274	0275	0276		0277	
R0106-01	20	26	8	1			0278	0279	0280	0281	0282	0283	0284	0285	0286	0287	
R0106-01	25	32	10	1				0295	0288	0289	0290	0291	0292	0293	0294		
R0106-01	32	40	10	1								0296	0297	0298	0299	0300	