


R0108

Espulsore lamellare nitrurato DIN1530/ISO8693 - ELN
Nitrided blade ejector pin DIN1530/ISO8693 - ELN

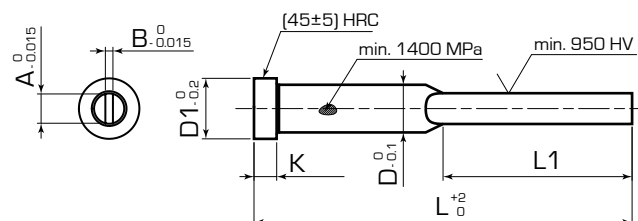

Descrizione:

Materiale: 1.2344 Nitrurato
Temperatura max. di esercizio: 500/550 °C
Rivestimento: DLC su richiesta
Esempio di ordinativo: R0108-01-0001

Description:

Material: 1.2344 Nitrided
Max. work temperature: 500/550 °C
Coating: DLC upon request
Example of purchasing order: R0108-01-0001

Codice Code	D	D1	A	B	K	L							
						80	100	125	160	200	250	315	400
						L1							
						40	50	65	80	100	125	155	200
R0108-01	4	8	3.5	1	3	0001	0002	0003					
R0108-01	4.2	8	3.8	1	3	0004	0006	0008	0010				
R0108-01	4.2	8	3.8	1.2	3	0005	0007	0009	0011	0012			
R0108-01	5	10	4.5	1	3	0013	0016	0019	0022	0025			
R0108-01	5	10	4.5	1.2	3	0014	0017	0020	0023	0026			
R0108-01	5	10	4.5	1.5	3	0015	0018	0021	0024	0027			
R0108-01	6	12	5.5	1	5	0028	0030	0034	0038	0042			
R0108-01	6	12	5.5	1.2	5	0029	0031	0035	0039	0043			
R0108-01	6	12	5.5	1.5	5		0032	0036	0040	0044			
R0108-01	6	12	5.5	2	5		0033	0037	0041	0045			
R0108-01	8	14	7.5	1.2	5		0046	0049	0052	0055			
R0108-01	8	14	7.5	1.5	5		0047	0050	0053	0056			
R0108-01	8	14	7.5	2	5		0048	0051	0054	0057		0058	
R0108-01	10	16	9.5	1.5	5		0059	0061	0063	0065	0067	0069	
R0108-01	10	16	9.5	2	5		0060	0062	0064	0066	0068	0070	
R0108-01	12	18	11.5	2	7				0071	0073	0075	0077	
R0108-01	12	18	11.5	2.5	7				0072	0074	0076	0078	
R0108-01	16	22	15.5	2	7				0079	0081	0083	0085	0087
R0108-01	16	22	15.5	2.5	7				0080	0082	0084	0086	0088