


R0111 Espulsore con spalla temprato DIN1530/ISO8694 - CH Hardened stepped ejector pin DIN1530/ISO8694 - CH

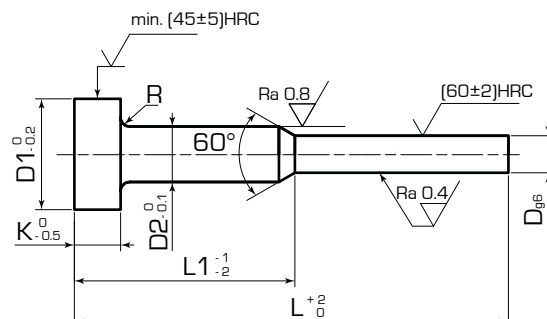

Descrizione:

Esempio di ordinativo: R0111-01-0001

Materiale: 1.2210 Temprato
Temperatura max. di esercizio: 250 °C

Description:

Example of purchasing order: R0111-01-0001

Material: 1.2210 Hardened
Max. work temperature: 250 °C

Codice Code	D	D1	D2	K	R	L										
						63	80	100	125	160	160	160	200	200	250	250
						L1										
						25	35	50	50	50	63	75	75	80	75	100
R0111-01	0.5	4	2	2	0.2		0001	0002	0003		0004					
R0111-01	0.6	4	2	2	0.2		0005	0006	0007		0008					
R0111-01	0.7	4	2	2	0.2		0009	0010	0011		0012					
R0111-01	0.8	4	2	2	0.2	0013	0014	0015	0016		0018	0019	0020			
R0111-01	0.9	4	2	2	0.2	0021	0022	0023	0024		0026	0027	0028			
R0111-01	1	4	2	2	0.2	0029	0030	0031	0033	0036	0037	0039	0040	0041		
R0111-01	1	6	3	3	0.3			0032	0034		0038			0042		0043
R0111-01	1.1	4	2	2	0.2	0044	0045	0046	0047		0049	0050	0051			
R0111-01	1.2	4	2	2	0.2	0052	0053	0054	0055		0057	0058	0059	0060		
R0111-01	1.3	4	2	2	0.2	0061	0062	0063	0064		0066	0067	0068			
R0111-01	1.4	4	2	2	0.2	0069	0070	0071	0072		0074	0075	0076			
R0111-01	1.5	6	3	3	0.3	0077	0078	0080	0082	0084	0086	0087	0088	0090		0091
R0111-01	1.6	6	3	3	0.3		0092	0093	0094		0096	0097	0098			
R0111-01	1.7	6	3	3	0.3		0099	0100	0101		0103	0104	0105			
R0111-01	1.8	6	3	3	0.3		0106	0107	0108		0110	0111	0112			
R0111-01	1.9	6	3	3	0.3		0113	0114	0115		0117	0118	0119			
R0111-01	2	6	3	3	0.3		0120	0121	0122	0124	0125	0126	0127	0128	0129	0130
R0111-01	2.1	6	3	3	0.3		0131	0132	0133		0135	0136	0137			
R0111-01	2.2	6	3	3	0.3		0138	0139	0140		0142	0143	0144			
R0111-01	2.3	6	3	3	0.3		0145	0146	0147		0149	0150	0151			
R0111-01	2.4	6	3	3	0.3		0152	0153	0154		0156	0157	0158			
R0111-01	2.5	6	3	3	0.3		0159	0160	0161	0163	0164	0165	0166	0167	0168	0169
R0111-01	2.6	6	3	3	0.3			0170	0171		0172	0173				
R0111-01	2.7	6	3	3	0.3				0175		0176	0177	0174			
R0111-01	2.8	6	3	3	0.3			0178	0179		0180	0181				
R0111-01	2.9	6	3	3	0.3						0182	0183	0184			