


R0219 Barra temprata e rettificata - BRT Grinded and hardened bar - BRT

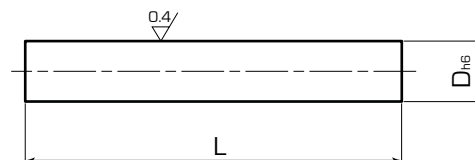

Descrizione:

Materiale: CF 53
Durezza: HRC 62-64
Trattamento termico: Tempra a induzione
Profondità tempra: Ø4 - 20 = 0.8 - 1.8 mm
Ø30 - 50 = 2 - 2.5 mm
Ø60 - 100 = 2.8 - 3.5 mm

Description:

Material: CF 53
Hardness: HRC 62-64
Heat treatment: Induction hardening
Hardening depth: Ø4 - 20 = 0.8 - 1.8 mm
Ø30 - 50 = 2 - 2.5 mm
Ø60 - 100 = 2.8 - 3.5 mm

Codice Code	D	L
R0219-03-0001	4	1000
R0219-03-0002	5	1000
R0219-03-0003	6	1000
R0219-03-0004	8	1000
R0219-03-0005	10	1000
R0219-03-0006	12	1000
R0219-03-0007	14	1000
R0219-03-0008	15	1000
R0219-03-0009	16	1000
R0219-03-0010	18	1000
R0219-03-0011	20	1000
R0219-03-0012	22	1000
R0219-03-0013	24	1000
R0219-03-0014	25	1000
R0219-03-0015	28	1000
R0219-03-0016	30	1000
R0219-03-0017	32	1000
R0219-03-0018	35	1000
R0219-03-0019	40	1000
R0219-03-0020	45	1000
R0219-03-0021	50	1000
R0219-03-0022	60	1000
R0219-03-0023	70	1000
R0219-03-0024	80	1000
R0219-03-0025	100	1000