



PC2234 PORTAGOMMA IN ACCIAIO ZINCATO 45° PROFILO EASY-LOCK FIL. FEMMINA BSPP GIREVOLE
GALVANIZED STEEL EASY-LOCK HOSE TAIL 45° WITH SWIVEL BSPP FEMALE THREAD

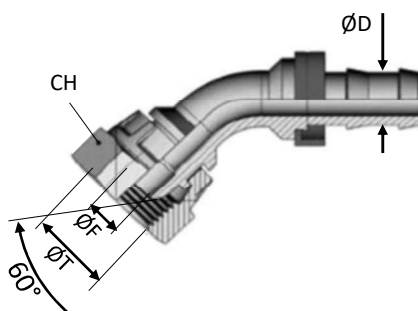

Codice-Code	CH	ØD tubo/hose	ØF	L	T	max bar	
PC2234-06-M014	19	6,3	1/8"	4	-	M14x1.5	5
PC2234-06-M016	20	9,5	3/8"	7	-	M16x1.5	5
PC2234-06-G014	19	6,3	1/4"	4	-	G1/4"	5
PC2234-10-M016	20	9,5	3/8"	7	-	M16x1.5	5
PC2234-10-M018	20	9,5	3/8"	7	-	M18x1.5	5
PC2234-10-G038	22	9,5	3/8"	7	-	G3/8"	5
PC2234-13-M022	27	12,7	1/2"	9,5	-	M22x1.5	5
PC2234-13-G012	27	12,7	1/2"	9,5	-	G1/2"	5
PC2234-16-M026	32	16	5/16"	14,5	-	M26x1.5	5
PC2234-19-G034	32	19,1	3/4"	14,5	-	G3/4"	5
PC2234-19-M030	32	19,1	3/4"	14,5	-	M30x1,5	5
PC2234-25-G100	46	25	1"	20	-	G1"	5

PC2248 RACCORDO IN OTTONE NICHELATO PORTAGOMMA 90° FILETTO MASCHIO BSPP
NIKEL PLATED BRASS HOSE TAIL WITH 90° BSPP MALE THREAD



Codice-Code	CH	ØD tubo/hose	ØF	L	L1	T	
PC2248-08-G014	20	8	-	26	10	G1/4"	5
PC2248-10-G014	20	10	3/8"	28	10	G1/4"	5
PC2248-10-G038	20	10	3/8"	28	10	G3/8"	5
PC2248-12-G038	20	12	-	30	10	G3/8"	5
PC2248-13-G012	25	13	1/2"	32	12,5	G1/2"	1
PC2248-16-G012	25	15,9	5/8"	34	12,5	G1/2"	1

Raccordatura raccomandata - recommended clamping - p. I37

