


R0717 Golfare girevole con anello - 800X Rotating eye bolt with ring - 800X

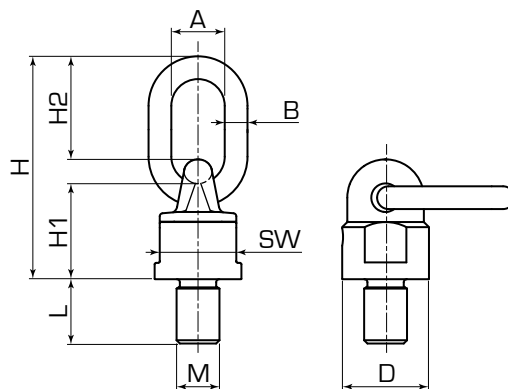

CARTEC100

Descrizione:

Nota: non idoneo per il movimento rotatorio continuato a pieno carico.
Disponibile, su richiesta, filettatura e lunghezza gambo fuori standard.

Description:

Nota: not suitable for continuous rotation movement during loading.
Available, on demand, not standard threading and stem length.

Codice Code	WLL (t)	M x L	Coppia Max. serraggio Max tightening Torque (Nm)	Peso Weight (Kg)	Dimensioni Dimensions (mm)						
					A	B	H2	H1	H	SW	D
R0717-20-0001	0.3	M8 x 16	16	0.48	30	13	46	50	105	30	38
R0717-20-0002	0.3	M8 x 18	16	0.48	30	13	46	50	105	30	38
R0717-20-0003	0.5	M10 x 18	16	0.48	30	13	46	50	105	30	38
R0717-20-0004	0.7	M12 x 18	28	0.5	30	13	46	50	105	30	38
R0717-20-0005	1	M14 x 20	46	0.53	30	13	46	50	105	30	38
R0717-20-0006	1.4	M16 x 20	70	0.53	30	13	46	50	105	30	38
R0717-20-0007	1.7	M20 x 30	135	0.53	30	13	46	50	105	30	38
R0717-20-0008	1.7	M24 x 30	135	0.53	30	13	46	50	105	30	38
R0717-20-0009	2.5	M20 x 30	135	1.05	34	16	57	61	131	40	50
R0717-20-0010	4	M24 x 30	230	1.63	40	18	70	68	153	48	58
R0717-20-0011	4	M30 x 35	465	1.63	40	18	70	68	153	48	58
R0717-20-0012	6.7	M30 x 35	465	2.85	45	22	65	71	156	70	80
R0717-20-0013	8	M30 x 45	465	4.4	50	23	91	86	200	80	90
R0717-20-0014	10	M36 x 54	814	4.62	50	23	91	86	200	80	90
R0717-20-0015	12.5	M42 x 63	1304	5.2	50	23	91	86	200	80	90
R0717-20-0016	12.5	M45 x 60	1670	5.2	50	23	91	86	200	80	90
R0717-20-0017	12.5	M48 x 72	1981	5.2	50	23	91	86	200	80	90
R0717-20-0018	16	M45 x 60	1670	10.9	70	32	120	112	262	100	120
R0717-20-0019	17	M48 x 60	1981	10.9	70	32	120	112	262	100	120
R0717-20-0020	18	M56 x 78	3000	10.9	70	32	120	112	262	100	120
R0717-20-0021	20 (25)	M64 x 96	4738	10.9	70	32	120	112	262	100	120
R0717-20-0022	28	M64 x 96	4738	29	90	45	124	165	333	140	170
R0717-20-0023	31.5	M72 x 108	6913	29	90	45	124	165	333	140	170
R0717-20-0024	35	M80 x 120	9625	29	90	45	124	165	333	140	170
R0717-20-0025	40	M90 x 135	14000	29	90	45	124	165	333	140	170

Golfare girevole destinato al sollevamento di carichi da assemblare al carico stesso mediante idoneo foro filettato generalmente utilizzato per girare o ribaltare carichi pesanti.

- Coefficiente di sicurezza 4 in tutte le direzioni di carico
- Progettato, testato e certificato secondo norme tecniche GS-MO 1504 - EN 1677
- Idoneo al sollevamento in sicurezza secondo direttiva macchine 2006/42/EC
- Testato 100 % magnaflux
- Testato a 20.000 cicli di fatica
- Filettatura e lunghezza gambo fuori standard su richiesta
- Orientabile a 360° con anello ribaltabile a 180° autoallineante
- Assemblato con sfere per facilitare l'orientamento del carico
- Sul tiro assiale è consentito uno scostamento di $\pm 5^\circ$ con una riduzione della portata del 10 %

Turning eyebolt needed to lift loads to assemble to the load itself with specific threaded hole generally used to turn or tilt heavy loads.

- Coefficient 4 in all loading directions
- Designed, tested and certified in compliance with the technical directives GS-MO 1504 - EN 1677
- Suitable for safe lifting in compliance with the machinery directive 2006/42/EC
- Tested at 100 % magnaflux
- Tested at 20.000 stress cycles
- Non standard threading and stem length upon request
- Can be oriented at 360° with self aligning tilting ring at 180°
- Assembled with spheres to make load orientation easier
- On the axial pull there can be variation of $\pm 5^\circ$ with a 10% decrease in capacity

R0717

Golfare girevole con anello - 800X
Rotating eye bolt with ring - 800X



CARTEC100

	Numero di bracci Number of legs	Direzione di Carico Load direction	Cod. R0717-20-	0001	0003	0004	0005	0006	0007	0009	0010	0012	0013	0014	0015	0018	0019	0020	0021	0022	0023	0024	0025
			M x L	M8 x 16	M10 x 18	M12 x 18	M14 x 20	M16 x 20	M20 x 30	M20 x 30	M24 x 30	M30 x 35	M30 x 45	M36 x 54	M42 x 63	M45 x 60	M48 x 60	M56 x 78	M64 x 96	M64 x 96	M72 x 108	M80 x 120	M90 x 135
	1	0°		0.6	1	1.4	2	2.8	3.4	5	8	12	12.5	15	15	25	25	25	25	32.5	50	50	50
	2	0°		1.2	2	2.4	4	5.6	6.8	10	16	26.8	25	30	34	50	50	50	50	84	100	100	100
	1	90°		0.3	0.5	0.7	1	1.4	1.7	2.5	4	6.7	8	10	12.5	16	17	18	20	28	31.5	35	40
	2	90°		0.6	1	1.4	2	2.8	3.4	5	8	13.4	16	20	25	30	34	36	40	56	63	70	80
	2	0 - 45°		0.42	0.75	1	1.4	2	2.4	3.5	5.6	9.4	11.2	14	17.5	21.2	23.5	25.2	28	39.2	44.1	49	56
	2	45° - 60°		0.3	0.5	0.7	1	1.4	1.7	2.5	4	6.7	8	10	12.5	15	17	18	20	28	31.5	35	40
	2	assimm. asymm.		0.3	0.5	0.7	1	1.4	1.7	2.5	4	6.7	8	10	12.5	15	17	18	20	28	31.5	35	40
	3 - 4	0° - 45°		0.63	1	1.4	2.1	3	3.6	5.3	8.4	14	16.8	21.2	26.2	31.5	35.7	37	42.5	58.8	66.2	73.5	85
	3 - 4	45° - 60°		0.45	0.75	1	1.5	2.1	2.5	3.7	6	10	12	15	18.7	22.4	25.5	27	30	42	47.2	52.5	60
	3 - 4	assimm. asymm.		0.3	0.5	0.7	1	1.4	1.7	2.5	4	6.7	8	10	12.5	15	17	18	20	28	31.5	35	40